

Throttle-free Banjo Couplings


DSVW-G

Dimensions in mm

DIN Fittings

Metric Tube end as per ISO 8434

Male stud - BSPP (G) threads

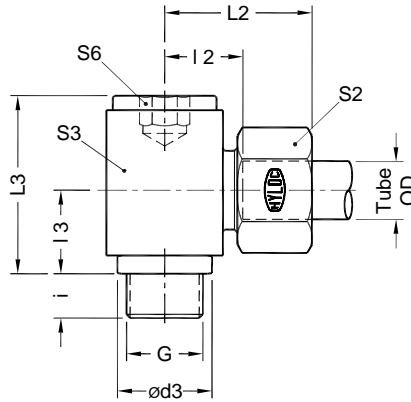

| Part No. | Series | Tube od | BSP thread G | ød3 | i | I 2 | I 3 | * L2 | L3 | S2 | S3 | S6 |
|-----------|--------------------|---------|--------------|---------|----|------|------|------|------|----|----|----|
| DSVW06PLG | Light L 250 bar | 6 | G 1/8 A | 14 | 8 | 12.5 | 12 | 28.0 | 24 | 14 | 19 | 6 |
| DSVW08PLG | | 8 | G 1/4 A | 18 | 12 | 14.5 | 16 | 29.5 | 30 | 17 | 22 | 8 |
| DSVW10PLG | | 10 | G 1/4 A | 18 | 12 | 15.5 | 16 | 31.0 | 30 | 19 | 22 | 8 |
| DSVW12PLG | | 12 | G 3/8 A | 22 | 12 | 18.5 | 18 | 33.5 | 37 | 22 | 27 | 10 |
| DSVW15PLG | | 15 | G 1/2 A | 26 | 14 | 22.0 | 21 | 38.0 | 42 | 27 | 32 | 12 |
| DSVW18PLG | 100 bar | 18 | G 1/2 A | 26 | 14 | 21.5 | 23 | 38.5 | 46 | 32 | 36 | 12 |
| DSVW22PLG | | 22 | G 3/4 A | 32 | 16 | 28.5 | 28 | 45.5 | 58 | 36 | 46 | 17 |
| DSVW28PLG | 100 bar | 28 | G 1 A | 39 | 18 | 31.5 | 32 | 49.5 | 64 | 41 | 50 | 22 |
| DSVW35PLG | | 35 | G1 1/4 A | 49 | 20 | 35.5 | 37 | 58.5 | 76 | 50 | 60 | 27 |
| DSVW42PLG | | 42 | G1 1/2 A | 55 | 22 | 40.0 | 42 | 63.5 | 85 | 60 | 70 | 32 |
| DSVW06PSG | Heavy S 400 bar | 6 | G 1/4 A | 18 | 12 | 16.5 | 16 | 32.0 | 30 | 17 | 22 | 8 |
| DSVW08PSG | | 8 | G 1/4 A | 18 | 12 | 16.5 | 16 | 31.5 | 30 | 19 | 22 | 8 |
| DSVW10PSG | | 10 | G 3/8 A | 22 | 12 | 18.5 | 18 | 35.5 | 37 | 22 | 27 | 10 |
| DSVW12PSG | | 12 | G 3/8 A | 22 | 12 | 18.5 | 18 | 35.0 | 37 | 24 | 27 | 10 |
| DSVW16PSG | | 400 bar | 16 | G 1/2 A | 26 | 14 | 22.5 | 23 | 41.5 | 46 | 30 | 32 |
| DSVW20PSG | 20 | | G 3/4 A | 32 | 16 | 27.5 | 28 | 50.0 | 58 | 36 | 46 | 17 |
| DSVW25PSG | 25 | | G 1 A | 39 | 18 | 31.0 | 32 | 56.0 | 64 | 46 | 50 | 22 |
| DSVW30PSG | 250 bar | 30 | G1 1/4 A | 49 | 20 | 36.5 | 37 | 64.5 | 76 | 50 | 60 | 27 |
| DSVW38PSG | | 38 | G1 1/2 A | 55 | 22 | 41.0 | 42 | 72.5 | 85 | 60 | 70 | 32 |

* Dimensions given are approx figures with tightened nut.